

Delay Mitigation in Tall Building Projects

Authors:


Muizz Oladapo Sanni-Anibire¹, Rosli Mohamad Zin², Sunday
Olusanya Olatunji (Aadam)³

Email:

rosilinz@utm.my²

Abstract: The rise of tall buildings in urban centres across the globe has been attributed to the need to create more urban space for an imminent population explosion and urbanization crisis. Despite the potential of this building typology as a sustainable alternative to urban design, it has become notorious for being delayed, and sometimes abandoned. The research domain is saturated with numerous studies on the causes of construction delays, however inadequate effort has been channelled towards the development of prescriptive tools with the potential to mitigate construction delay. The desired solution is one that would employ innovative methods to arrive at problem solving strategies for the ultimate purpose of delay mitigation. Today, the fourth industrial revolution (IR 4.0) offers the construction industry a unique opportunity to solve its many woes, such as delays, through leveraging the capabilities of digital technologies such as artificial intelligence and machine learning. Thus, it is the purpose of this book to describe a delay mitigation framework proposed for tall building projects based on the application of machine learning. The application of machine learning is considered in three major areas of project delay risk mitigation including “reliable cost estimates”, “reliable duration estimates”, and “delay risk assessment”. Interestingly, the concept of the delay mitigation framework can be extended to other project types, besides tall building projects.

Keywords: Cost, delay, Industry 4.0, risk, schedule

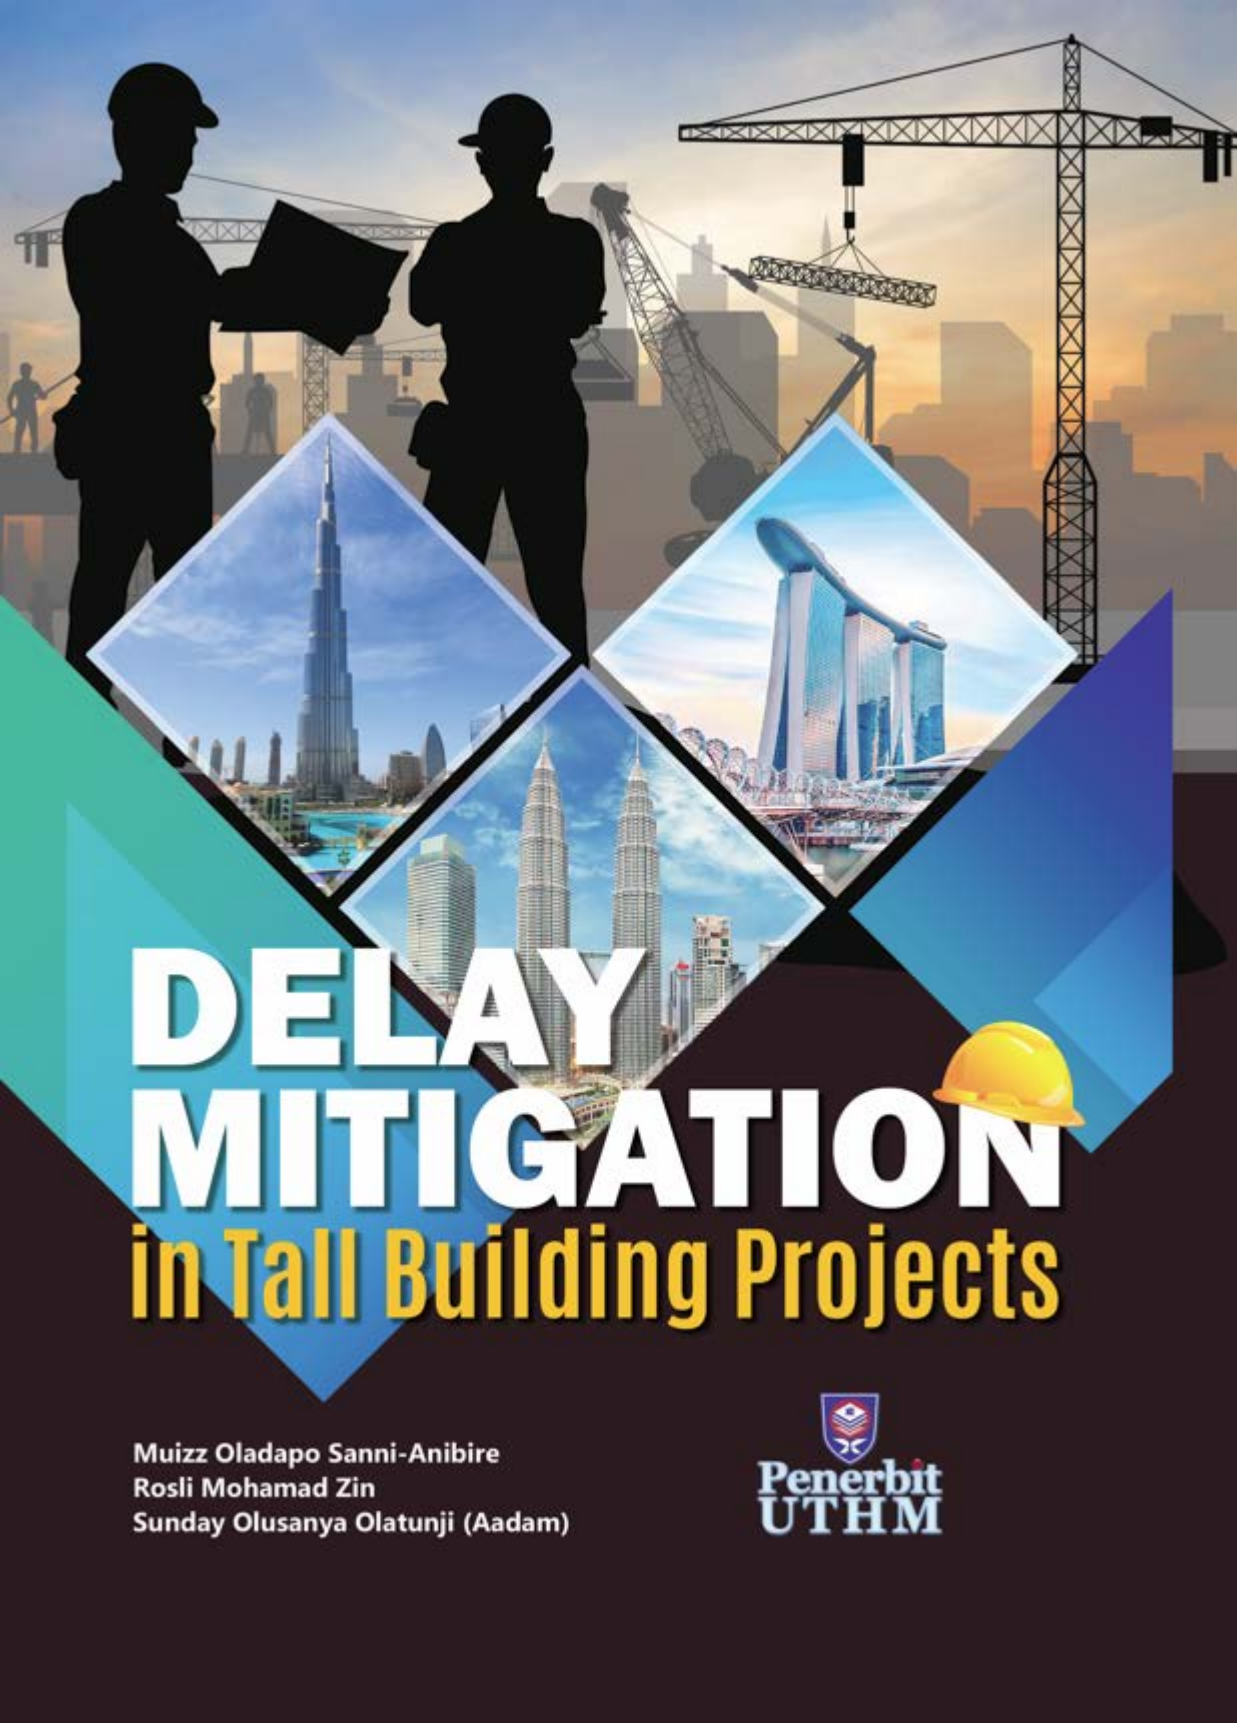

DELAY MITIGATION

in Tall Building Projects



Muizz Oladapo Sanni-Anibire
Rosli Mohamad Zin
Sunday Olusanya Olatunji (Aadam)



DELAY MITIGATION in Tall Building Projects



DELAY MITIGATION in Tall Building Projects



Muizz Oladapo Sanni-Anibire
Rosli Mohamad Zin
Sunday Olusanya Olatunji (Aadam)



© Penerbit UTHM
First Published 2022

Copyright reserved. Reproduction of any articles, illustrations and content of this book in any form be it electronic, mechanical photocopy, recording or any other form without any prior written permission from The Publisher's Office of Universiti Tun Hussein Onn Malaysia, Parit Raja, Batu Pahat, Johor is prohibited. Any negotiations are subjected to calculations of royalty and honorarium.

Perpustakaan Negara Malaysia

Cataloguing in Publication Data

Perpustakaan Negara Malaysia Cataloguing-in-Publication Data

Sanni-Anibire, Muizz Oladapo, 1987-

DELAY MITIGATION in Tall Building Projects / Muizz Oladapo Sanni-Anibire, Rosli Mohamad Zin, Sunday Olusanya Olatunji (Aadam).

ISBN 978-967-0061-10-8

1. Construction industry.

2. Tall buildings.

3. Building--Estimates.

I. Rosli Mohamad Zin, 1965-. II. Sunday Olusanya Olatunji (Aadam), 1974-.

III. Judul.

624

Published and printed by:
Penerbit UTHM
Universiti Tun Hussein Onn Malaysia
86400 Parit Raja,
Batu Pahat, Johor
Tel: 07-453 7051 / 7454
Fax: 07-453 6145

Website: <http://penerbit.uthm.edu.my>
E-mail: pt@uthm.edu.my
<http://e-bookstore.uthm.edu.my>

Penerbit UTHM is a member of
Majlis Penerbitan Ilmiah Malaysia
(MAPIM)

*This book is dedicated to all who have inspired
and motivated our journey in life*

CONTENTS

Dedication	v
List of Figures	xi
List of Tables	xiii
Preface	xv
Acknowledgement	xvii

INTRODUCTION

1.1	Origin and Evolution of Tall Buildings	3
1.2	Schedule Delays in Tall Building Projects	9
1.3	The Struggle for Productivity in Construction Industry	10
1.4	Industry 4.0 And Construction 4.0	12
1.5	Modern Approaches for Delay Mitigation in Tall Buildings	13
	1.5.1 Modern Construction Technologies for Tall Buildings	13
	1.5.2 Innovative Project Management Approaches for Tall Buildings	18
1.6	Research Direction In Delay Mitigation	19

CONSTRUCTION DELAYS

2.1	Definition	23
2.2	Types of Construction Delays	23
	2.2.1 Avoidable or Unavoidable Delays	24
	2.2.2 Critical or Noncritical Delays	24
	2.2.3 Concurrent or Non-concurrent Delays	25
2.3	Causes of Construction Delays	25
	2.3.1 Country Related Studies on Causes of Construction Delay	26
	2.3.2 Project Type Related Studies on Causes of Construction Delays	27
	2.3.3 Common Causes of Construction Delay	28

2.3.4	Causes of Construction Delays in Tall Building Projects	31
a)	Respondents' Profile	31
b)	Ranking of Delay Causes in Tall Buildings	33
2.4	Effect of Construction Delays	37
2.4.1	Time Overrun	39
2.4.2	Cost Overrun	39
2.4.3	Disputes	39
2.4.4	Arbitration	39
2.4.5	Litigation	40
2.4.6	Project Abandonment (Termination of Contract)	40
2.5	Construction Delay Mitigation	40
2.5.1	Delay Mitigation Strategies	41
2.5.2	The Need for a New Delay Mitigation Framework	44
2.5.3	Conceptual Machine Learning-Based Delay Mitigation Framework	49
 COST AND DURATION ESTIMATION		
3.1	Introduction	55
3.1.1	Estimating Project Durations	55
3.1.2	Estimating Project Costs	56
3.1.3	Modern Methods in Construction Cost and Duration Estimation	56
3.1.4	Applications of Machine Learning in Construction Duration and Cost Estimation	58
3.2	Developing Machine Learning Models For Estimating The Cost And Duration of Tall Building Projects	60
3.2.1	Dataset Establishment	60
3.2.2	Data Pre-processing	60
3.2.3	Views of the Dataset	61

3.2.4	Feature Selection	62
3.2.5	Hyper-parameter Optimization	63
3.2.6	Performance Measurement of Machine Learning Models	64
3.2.7	Combining Algorithms (Multi Classifier Systems)	65
3.3	ML Cost Model for Tall Building Projects	66
3.3.1	Dataset for Cost Estimation	66
3.3.2	Comparison of Various Views of the Dataset	67
3.3.3	Feature Subset Selection	68
3.3.4	Performance of Machine Learning Algorithms	69
3.3.5	Performance of Ensemble Methods (Multi Classifier Systems)	71
a)	Leveraging (fixed rules)	71
b)	Stacking (trained rules)	71
3.3.6	Dissussion on ML Cost Model for Tall Building Projects	72
3.4	ML Duration Model for Tall Building Projects	74
3.4.1	Dataset for Duration Estimation	74
3.4.2	Comparison of Various Views of the Dataset	75
3.4.3	Feature Subset Selection	76
3.4.4	Performance of Machine Learning Algorithms	77
3.4.5	Performance of Ensemble Methods (Multi Classifier Systems)	78
3.4.6	Dissussion on ML Duration Model for Tall Building Projects	79

DELAY RISK ASSESSMENT

4.1	Introduction	85
-----	--------------	----

4.1.1	Estimating Construction Project Schedule Delays	85
4.1.2	Applications of Machine Learning to Construction Project Schedule Delays	87
4.2	Developing Machine Learning Models for Delay Risk Assessment in Tall Building Projects	87
4.2.1	Dataset Establishment	87
4.2.2	Feature Subset Selection	91
4.2.3	Performance of Machine Learning Algorithms	92
4.2.4	Discussion of ML Delay Risk Model for Tall Building Projects	94
 DELAY MITIGATION FRAMEWORK		
5.1	Introduction	99
5.1.1	Business Understanding	99
5.1.2	Data Understanding	100
5.1.3	Data Preparation	100
5.1.4	Modeling	100
5.1.5	Evaluation	101
5.1.6	Deployment	102
5.2	Validation of The Proposed Delay Mitigation Framework	103
5.3	Discussion on The Proposed Delay Mitigation Framework	106
5.4	Conclusions	107
	Appendix A	111
	Appendix B	115
	References	117
	Index	129
	Biodata of Authors	133

List of Figures

Figure 1.1	Third century brick city in Shibam, Eastern Yemen (Also known as Manhattan of the Dessert)	4
Figure 1.2	a) Home Insurance Building in Chicago, demolished in 1931	4
	b) Monadnock Building in Chicago	4
	c) Reliance Building in Chicago	5
	d) Chrysler Building in New York	5
	e) Empire State Building in New York	5
	f) World Trade Centre in New York	5
Figure 1.3	The skyline of major urban centres across the globe featuring iconic tall building projects	
	a) Shanghai, China	6
	b) Singapore business district	6
	c) Hong Kong	7
	d) Dubai, UAE	7
	e) Kuala Lumpur, Malaysia	7
	f) Riyadh, Saudi Arabia	7
Figure 1.4	Dense urban population and the growing Shinjuku skyscrapers in Tokyo, Japan	8
Figure 1.5	Jeddah Tower in Saudi Arabia	10
Figure 1.6	Slip forming used in the construction of the core wall for a Tall Building in Malaysia	14
Figure 2.1	Major Types of Construction Delays	24
Figure 2.2	Ishikawa diagram illustrating common delay causes in the construction industry	29
Figure 2.3	Respondents' professional category	32
Figure 2.4	Respondents' location	32
Figure 2.5	Respondents' job role/position	33
Figure 2.6	Respondents' years of experience related to tall building projects	33

Figure 2.7	Machine learning classifications and techniques	47
Figure 2.8	Conceptual Delay Mitigation Framework based on CRISP-DM	52
Figure 3.1	Current input variables for construction duration and cost estimation	58
Figure 3.2	General methodology for developing the proposed machine learning models	61
Figure 3.3	Architecture of the proposed multi-classifier system	65
Figure 3.4	Cross-plots of the actual vs. predicted cost values for the best performing models	73
Figure 3.5	Plot of RMSE values for selected models for cost estimation	74
Figure 3.6	Cross-plots of the actual vs. predicted duration values for the best performing models	81
Figure 3.7	Plot of RMSE values for selected models for duration estimation	81
Figure 4.1	Discretization matrix adopted for delay risk assessment	91
Figure 5.1	Proposed Delay Mitigation Framework based on CRISP-DM	99

List of Tables

Table 1.1	Unfinished iconic tall building projects across the world (Source: CTBUH data,2014)	15
Table 2.1	Common delay causes in the construction industry	30
Table 2.2	Relative Importance Index of the Causes of Delay in Tall Building Projects	36
Table 2.3	Strategies for Delay Mitigation	43
Table 3.1	Description of ML algorithm's optimizable hyper-parameters (Larranaga et al., 2018)	64
Table 3.2	Descriptive statistics of the dataset	66
Table 3.3	Attribute conversion of non-numerical values of the data	67
Table 3.4	Performance of various views of the dependent variable cost	67
Table 3.5	Performance of ML algorithms for various views of the dataset	68
Table 3.6	Description of feature subsets based on CorrelationAttributeEval	68
Table 3.7	Performance of ML algorithms for various feature sets	69
Table 3.8	ML models (combinations of classifiers, Hyperparameters and selected feature sets)	70
Table 3.9	Performance of initial ML models	71
Table 3.10	ML models based on Multi Classifier System (MCS)	72
Table 3.11	Performance of ML models based on MCS	72
Table 3.12	Descriptive statistics of the numerical features in the dataset	75
Table 3.13	Description of the non-numeric (categorical) features of the dataset	75
Table 3.14	Performance (RMSE) of ML algorithms for various views of the dataset	76

Table 3.15	Description of selected feature subsets based on CorrelationAttributeEval	77
Table 3.16	Performance (RMSE) of ML algorithms for various feature subsets	77
Table 3.17	ML models (combinations of algorithm, hyperparameters and selected feature sets)	78
Table 3.18	Performance of initial ML models	78
Table 3.19	ML models based on Ensemble Methods	79
Table 3.20	Performance of ML models based on Ensemble Method	79
Table 4.1	Descriptive statistics of the questionnaire response	89
Table 4.2	Compiled data set structure for delay risk	91
Table 4.3	Description of feature sets based on CorrelationAttributeEval	92
Table 4.4	Performance of SVM wrapper-based evaluation for various feature sets	92
Table 4.5	Hyper Parameters selected for ML models for delay risk assessment	93
Table 4.6	Performance of initial ML models	94
Table 4.7	Confusion matrix for best performing model (MODR1)	94
Table 5.1	Description of machine learning models for cost, duration and delay risk	102
Table 5.2	Validation scoring criteria (modified from Beecham et al., 2005)	103
Table 5.3	Details of professionals consulted for the validation process	104
Table 5.4	Mean validation scores from expert interviews	105

Preface

Over the last decade, the number of tall building construction around the world has increased significantly. This increase has been attributed to the need to create more urban space for an imminent population explosion and urbanization crisis. Unfortunately, construction delay and non-completion have become major issues when managing tall building projects.

This book highlights the research that has been conducted on delay in tall building projects, with the specific focus on the development of a framework for mitigating delay. The book also emphasizes the rise of technology in the modern construction industry driven by Construction 4.0, which is a phenomenon triggered by the fourth industrial revolution. Therefore, the main idea behind the development of the framework for mitigating delay is the adoption of machine learning, which is considered as one of the leading technologies driving the fourth industrial revolution. Among the main topics included in this book are construction delay, cost and duration estimation, delay risk assessment, and delay mitigation framework development.

The book allows the readers to understand the key factors that contribute to delay, and the potential mitigation strategy to overcome such delay. The content of this book has been carefully designed and arranged to enable an in depth understanding of the development process of the delay mitigation framework, hence can serve as reference to stakeholders in the construction industry. Furthermore, the book provides more understanding on issues related to construction delay from a broader perspective.

In preparing the book and implementing the related research, many important inputs were obtained through the experience of the authors and contribution of ideas from various parties. Without the support and contributions of these people a book such as this would not have been possible.

Acknowledgment

This research book would not have been completed without the support and assistance of numerous persons and organizations. Though, they cannot all be listed here, their contributions are sincerely appreciated and recognized.

Special thanks are also due to those who gave time to read and edit the manuscript. Their honest suggestions helped us to refine our ideas and approach throughout the writing process.

Finally, we would like to acknowledge with gratitude the support of Universiti Teknologi Malaysia for professional guidance on book publication, and providing the platform to publish this book.

Chapter 1

INTRODUCTION

1.1 ORIGIN AND EVOLUTION OF TALL BUILDINGS

Traditionally, humankind has always been fascinated with tall buildings. Ancient structures such as the Tower of Babel, Colossus of Rhodes, the pyramids of Egypt, Mayan temples of Mexico, the Kutub Minar of India, and many more were built to show power, pride and economic strength (Chew, 2017). Even today, tall buildings are still the fascination of many nations globally. The origin of tall buildings in the urban context can be traced to the world's oldest metropolis in Shibam, Eastern Yemen (see Figure 1.1). Also referred to as the “Manhattan of the desert”, Shibam is a third century mud brick city with a density of around 300 per hectare, where most buildings are 8 storeys high (Newman, 2001).

The evolution of the modern skyscraper is however attributed to the invention of the elevator by Elisha Graves Otis in 1853, and technological advancements in building materials in the late 1800s. The Home Insurance Building (see Figure 1.2a) was built as a 10-storey in Chicago in 1885, two stories were later added in 1890, to make it 12 stories tall with a height of 55 m (180 ft). In succession, the 16-story Monadnock Building (see Figure 1.2b) was constructed in Chicago, in 1891 to reach a height of 60 m (197 ft). Still in Chicago, the 15-story Reliance Building (see Figure 1.2c) was built in 1895 to a height of 61.6m (202ft). In the late 1920s, and early 1930s, the tall building boom was extended to other urban centres outside Chicago. The Chrysler Building in New York (see Figure 1.2d) was built in 1930, and was surpassed one year later by the Empire State Building (see Figure 1.2e) as the tallest building in the world, at a height of 382 m (1252 ft).

The tall building boom witnessed some paucity due to the Great Depression and World War II, and re-emerged in the 1960s. Hence, the Empire State Building remained the tallest building in the world for 41 years, until the World Trade Centre in New York (see Figure 1.2f) in 1972 (Sarkisian, 2016).

Chapter 2

**CONSTRUCTION
DELAYS**

2.1 DEFINITION

The construction industry for many decades has been plagued by the occurrence of schedule delays as a major source of productivity losses. According to the Merriam-Webster Dictionary, a delay is defined as *“the act of postponing, hindering, or causing something to occur more slowly than normal”*. The following technical definition of construction delay also occurs in the literature (Aibinu and Jagboro 2002; Trauner 2009; Sanni-Anibire et al., 2020):

“A situation where a project’s completion time is postponed due to causes that may be related to the client, consultant, or the contractor.”

“Situations where an event occurs at a time later than expected, or to be performed later than planned; or not to take timely actions; or occurring beyond the agreed date specified in the contract.”

2.2 TYPES OF CONSTRUCTION DELAYS

Construction delays can be categorized based on various perspectives including the liability of the stakeholders, effect on the project’s critical path, as well as the simultaneous occurrence of the delays. The major types of construction delays are illustrated in Figure 2.1, and subsequently described.

Chapter 3

**COST AND DURATION
ESTIMATION**

3.1 INTRODUCTION

In the previous chapter, the research theory confirmed that effective delay mitigation strategies can leverage the latest digital technologies in construction planning to more reliably estimate the cost and duration, and performance of projects associated with delay risks. Accordingly, this chapter describes the application of machine learning to construction planning in terms of cost and duration estimation. Generally, “planning relates to developing the logic of how a project will be constructed, while scheduling consists of integrating that plan with a calendar or a specific time” (Hinze, 2004). In construction planning, relevant activities include selecting appropriate construction methods, developing a Work Breakdown Structure (WBS), estimating durations, costs, equipment needs, human and material resources (Hendrickson et al., 1987a). The planning process is connected with the project scheduling, which is instrumental in managing the delivery of the construction project. Project scheduling helps to determine and illustrate the start and finish times of various tasks listed in the WBS (Pultar, 1990). A poorly developed project schedule is a causative factor for delays, and consequently cost and time overruns. The ensuing sections discuss the traditional methods used in estimating construction duration and cost, as well as the application of machine learning for the same.

3.1.1 Estimating Project Durations

The duration of an activity is simply the length of time or time span it takes to complete that activity, and which could typically be measured in hours, days, weeks, months or years. Typically, the duration of construction projects is usually estimated based on historical data from past projects, a “guesstimate” usually made by experienced schedulers, or by means of detailed analysis. Determining task durations by means of detailed analysis is dependent on the required human and material resources, as well as the productivity rates of these resources. Available reference guides are consulted to obtain productivity estimates for various tasks. This will entail unit productivity rates for equipment, while unit production times are applied to labor (Bielefeld, 2017). Published standard rates such as the R.S. Means publications are usually adjusted by regional or project-specific factors.

Chapter 4
**DELAY RISK
ASSESSMENT**

4.1 INTRODUCTION

This chapter describes the application of machine learning for determining project risks related to the identified causes of delay. This is an extension of the prior theory that effective delay mitigation strategies can leverage the latest digital technologies in construction planning. Specifically, construction project risk is an uncertain event or condition that, if it occurs, has a positive or negative effect on one or more project objectives such as scope, schedule, cost, and quality (Hossen et al. 2015). Effective risk management practices in construction are crucial to mitigating undesirable events such as schedule delays. ISO 31000: 2018 define risk as “the effect of uncertainty on an organization’s ability to meet its objectives”. Hence, risk assessment entails identifying events that have the likelihood to cause deviation in a project’s objectives, which in the case is the project delivery time. As given in ISO 31000:2018, the risk level is the product of an events’ consequence and its likelihood expressed mathematically as follows:

$$\text{Risk Level (RL)} = \text{Consequence (C)} * \text{Likelihood (L)}$$

The consequences of not estimating the risk of project schedule delays is damaging to clients, contractors, and consultants including issues of claims, disputes, and disruption. The ensuing sections discuss the methods used in estimating construction project schedule delays, as well as the application of machine learning for the same.

4.1.1 Estimating Construction Project Schedule Delays

The extant literature on schedule delay analysis has flourished since the 1990s, and continues to flourish. There are various schedule delay analysis methods used in the present construction industry. Delay analysis methods may include: “as-planned vs as-built”, “impacted as-planned”, “as-planned but for”, “collapsed as built”, “windows analysis”, “Time Impact Analysis”, and “global impact technique”. As-planned vs. As-Built method determines the difference between the as-planned and as-built completion dates as the time amount for which the claimant will request for compensation. Impacted As-Planned method uses only an as-planned or baseline schedule for delay

Chapter 5

**DELAY MITIGATION
FRAMEWORK**

5.1 INTRODUCTION

This chapter describes the framework proposed to mitigate delays in tall buildings based on the application of machine learning in three potential areas supported by the relevant literature. These include a reliable estimation of duration; reliable estimation of cost, and delay risk management (Abdul-Rahman et al., 2006; Gondia et al., 2020). The Cross-Industry Standard Process for Data Mining (CRISP-DM) was adapted as the vehicle to convey the graphical format of the proposed delay mitigation framework as shown in Figure 5.1. The delay mitigation framework covers five phases including business understanding, data understanding, data preparation, modeling, evaluation, and deployment which are described in the ensuing sections.

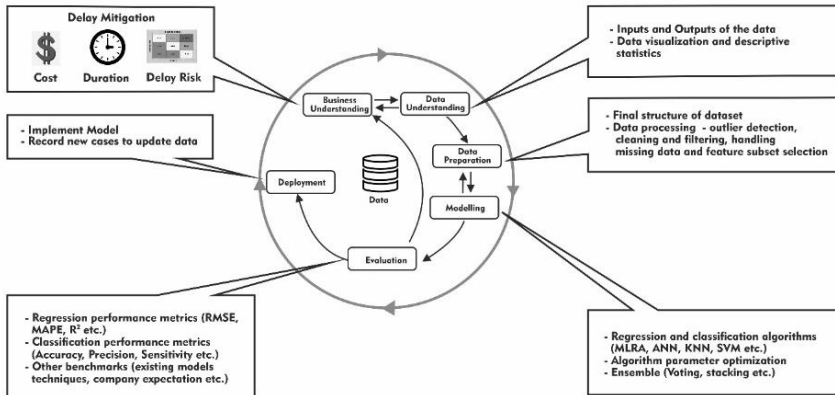


Figure 5.1 Proposed Delay Mitigation Framework based on CRISP-DM

5.1.1 Business Understanding

This entails defining the problem from a business perspective (i.e. cost, duration and delay risk) and obtaining relevant data. As stated earlier, the problem of delay could be mitigated through three key areas including: reliable estimation of cost, reliable estimation of duration, and delay risk assessment. Thus, relevant data required for machine learning application in these domains was obtained.

References

- Abdullah, M. R., Azis, A. A., & Rahman, I. A. (2009). Potential effects on large mara construction projects due to construction delay. *International Journal of Integrated Engineering*, 1(2).
- Abdul-Rahman, H., Berawi, M. A., Berawi, A. R., Mohamed, O., Othman, M., and Yahya, I. A. (2006). Delay mitigation in the Malaysian construction industry. *Journal of construction engineering and management*, 132(2), 125-133.
- Abdul-Rahman, H., Yahya, I. A., Berawi, M. A., & Wah, L. W. (2008). Conceptual delay mitigation model using a project learning approach in practice. *Construction Management and Economics*, 26(1), 15-27.
- Abedi, M., Fathi, M. S., and Mohammad, M. F. (2011). Major mitigation measures for delays in construction projects. In *The First Iranian Students Scientific Conference in Malaysia* (Vol. 9).
- Adeli, H. (2020). Four Decades of Computing in Civil Engineering. In *CIGOS 2019, Innovation for Sustainable Infrastructure* (pp. 3-11). Springer, Singapore.
- Adhikari, I., & Kim, S. Y. (2006). Selection of appropriate schedule delay analysis method: Analytical hierarchy process (AHP). In *2006 Technology Management for the Global Future-PICMET 2006 Conference* (Vol. 2, pp. 483-488). IEEE.
- Aibinu, A. A., & Jagboro, G. O. (2002). The effects of construction delays on project delivery in Nigerian construction industry. *International journal of project management*, 20(8), 593-599.
- Akande, K. O., Owolabi, T. O. and Olatunji, S. O. (2015). Investigating the effect of correlation-based feature selection on the performance of support vector machines in reservoir characterization. *Journal of Natural Gas Science and Engineering*. Elsevier, 22, pp. 515-522.
- Almuntaser, T., Sanni-Anibire, M. O., & Hassanain, M. A. (2018). Adoption and implementation of BIM—case study of a Saudi Arabian AEC firm. *International Journal of Managing Projects in Business*.
- AlSehaimi, A. (2011). Improving construction planning practice in Saudi Arabia by means of lean construction principles and techniques (Doctoral dissertation, University of Salford).
- AlSehaimi, A., Koskela, L. and Tzortzopoulos, P. (2013). Need for Alternative Research Approaches in Construction Management: Case of Delay Studies. *Journal of Management in Engineering*, 29(4), pp. 407-413.
- Alzara, M., Kashiwagi, J., Kashiwagi, D., & Al-Tassan, A. (2016). Using PIPS to

- minimize causes of delay in Saudi Arabian construction projects: university case study. *Procedia Engineering*, 145, 932-939.
- Amoatey, C. T., Lundin, R. A., Tryggestad, K., Ameyaw, Y. A., Adaku, E., & Famiyeh, S. (2015). Analysing delay causes and effects in Ghanaian state housing construction projects. *International Journal of Managing Projects in Business*, 8(1), pp. 198–214.
- Arafa, M., & Alqedra, M. (2011). Early stage cost estimation of buildings construction projects using artificial neural networks. *Journal of Artificial Intelligence*, 4(1), 63-75.
- Assaf, S. A. and Al-Hejji, S. (2006). Causes of delay in large construction projects. *International Journal of Project Management*, 24(4), pp. 349–357.
- Attal, A., (2010). Development of neural network models for prediction of highway construction cost and project duration (Doctoral dissertation, Ohio University).
- Azhar, S. (2011). Building information modeling (BIM): Trends, benefits, risks, and challenges for the AEC industry. *Leadership and management in engineering*, 11(3), 241-252.
- Banobi, E. T., & Jung, W. (2019). Causes and Mitigation Strategies of Delay in Power Construction Projects: Gaps between Owners and Contractors in Successful and Unsuccessful Projects. *Sustainability*, 11(21), 5973.
- Bassioni, H. A., Price, A. D., & Hassan, T. M. (2003). The development of a comprehensive framework for measuring business performance in construction.
- Bielefeld, B. (2017). Basics construction scheduling. Birkhäuser.
- Bin Seddeeq, A., Assaf, S., Abdallah, A., & Hassanain, M. A. (2019). Time and cost overrun in the Saudi Arabian oil and gas construction industry. *Buildings*, 9(2), 41.
- Bos, F., Wolfs, R., Ahmed, Z., and Salet, T. (2016). Additive manufacturing of concrete in construction: potentials and challenges of 3D concrete printing. *Virtual and Physical Prototyping*, 11(3), 209-225.
- Bosscher, P., Williams II, R. L., Bryson, L. S., & Castro-Lacouture, D. (2007). Cable-suspended robotic contour crafting system. *Automation in construction*, 17(1), 45-55.
- Bromilow, F.J., (1969). Contract time performance expectations and the reality. In *Building forum*, 1(3), 70-80.
- Brownlee, J., (2018). Machine learning mastery with Weka. URL: <https://machinelearningmastery.com/machine-learning-mastery-weka/>

- Budayan, C., Dikmen, I., Birgonul, M. T., and Ghaziani, A. (2018). A computerized method for delay risk assessment based on fuzzy set theory using MS Project™. *KSCE Journal of Civil Engineering*, 22(8), 2714-2725.
- Bunker, R. P., and Thabtah, F. (2019). A machine learning framework for sport result prediction. *Applied computing and informatics*, 15(1), 27-33.
- Burke, C. M., & Harris, M. J. (2016). Acceleration and mitigation of project delays. In *Construction Contract Claims, Changes, and Dispute Resolution* (pp. 139-152). Reston, VA: American Society of Civil Engineers.
- Canziani, A., Paszke, A., & Culurciello, E. (2016). An analysis of deep neural network models for practical applications. *arXiv preprint arXiv:1605.07678*.
- Chai, C. S., Yusof, A. M., and Habil, H. (2015). Delay mitigation in the Malaysian housing industry: A structural equation modelling approach. *Journal of Construction in Developing Countries*, 20(1), 65.
- Chapman, P., Clinton, J., Kerber, R., Khabaza, T., Reinartz, T., Shearer, C., & Wirth, R. (1999). The CRISP-DM user guide. In *4th CRISP-DM SIG Workshop in Brussels in March* (Vol. 1999). sn.
- Chew, Y. L. M. (2017). *Construction technology for tall buildings*. World scientific.
- Christian, J., & Hachey, D. (1995). Effects of delay times on production rates in construction. *Journal of Construction Engineering and Management*, 121(1), 20-26.
- Çınar, O., (2021). Future of forecast: machine learning. Available at: https://www.hka.com/future-of-forecast-machine-learning/?utm_source=Twitter&utm_medium=social&utm_campaign=Orlo&utm_content=Article+%2F+Thought+Leadership Accessed 23, Nov. 2021
- Cortes, C. and Vapnik, V. (1995) 'Support-vector networks', *Machine Learning*. Kluwer Academic Publishers, 20(3), pp. 273-297.
- CRUX (2020). CRUX INSIGHT. Engineering and Construction, A Regional Analysis of Causation. Lessons learned from clamins and disputes. Available at: <https://www.hka.com/wp-content/uploads/2020/11/CRUX-Insight-2020-Engineering-Construction-A-Regional-Analysis.pdf> Accessed 24, Nov. 2021
- CTBUH (2014). *Dreams deferred: unfinished tall buildings*. CTBUH Journal, Issue 4.
- CTBUH (2018). *CTBUH Year in Review: Tall Trends of 2018*. Available at: https://www.skyscrapercenter.com/research/CTBUH_ResearchReport_2018YearInReview.pdf. Accessed 21, Sept. 2020

- CTBUH (2022a). About CTBUH. Available at: <https://www.ctbuh.org/about>. Accessed 30, Jan. 2022
- CTBUH (2022b). Tall Building Criteria. Available at: <https://www.ctbuh.org/resource/height>. Accessed 30, Jan. 2022
- Deka, P. C. (2019). *A Primer on Machine Learning Applications in Civil Engineering*. CRC Press.
- Egan, J. (1998). *Rethinking construction*. Department of Environment, Transport and the Region.
- Egwim, C. N., Alaka, H., Toriola-Coker, L. O., Balogun, H., & Sunmola, F. (2021). Applied artificial intelligence for predicting construction projects delay. *Machine Learning with Applications*, 6, 100166.
- El-Kholy, A. M. (2019). Exploring the best ANN model based on four paradigms to predict delay and cost overrun percentages of highway projects. *International Journal of Construction Management*, 1-19.
- Ezeldin, A. S. and Abdel-Ghany, M. (2013). Causes of Construction Delays for Engineering Projects: An Egyptian Perspective, in AEI 2013. Reston, VA: American Society of Civil Engineers, pp. 54–63.
- Fallahnejad, M. H. (2013). Delay causes in Iran gas pipeline projects. *International Journal of Project Management*. Pergamon, 31(1), pp. 136–146.
- Farmer, M. (2016). *Modernise or Die—Time to decide the industry’s future*. Construction Leadership Council.
- Fellows, R. F., and Liu, A. M. (2015). *Research methods for construction*. John Wiley & Sons.
- Fix, E. and Hodges, J. (1951). Discriminatory analysis, nonparametric discrimination: Consistency properties. Technical Report 4, USAF School of Aviation Medicine, Randolph Field, Texas.
- Forbes, L. H., and Ahmed, S. M. (2010). *Modern construction: lean project delivery and integrated practices*. CRC press.
- Fugar, F. D. and Agyakwah-Baah, A. B. (2010). Delays in Building Construction Projects in Ghana. *Construction Economics and Building*, 10(1–2), p. 103.
- Galway, L. (2004). *Quantitative risk analysis for project management: A critical review*. RAND Corporation.
- Gao S., and Low S.P. (2014). *Research Methodology*. In: *Lean Construction Management*. Springer, Singapore.
- García de Soto, B. (2014). *A methodology to make accurate preliminary*

- estimates of construction material quantities for construction projects (Doctoral dissertation, ETH Zurich).
- Gondia, A., Siam, A., El-Dakhakhni, W., & Nassar, A. H. (2020). Machine Learning Algorithms for Construction Projects Delay Risk Prediction. *Journal of Construction Engineering and Management*, 146(1), 04019085.
- Guida, P. L., & Sacco, G. (2019). A method for project schedule delay analysis. *Computers & Industrial Engineering*, 128, 346-357.
- Guidotti, R., Monreale, A., Ruggieri, S., Turini, F., Giannotti, F., & Pedreschi, D. (2018). A survey of methods for explaining black box models. *ACM computing surveys (CSUR)*, 51(5), 1-42.
- Gunduz, M., Nielsen, Y. and Ozdemir, M. (2015). Fuzzy Assessment Model to Estimate the Probability of Delay in Turkish Construction Projects. *Journal of Management in Engineering*, 31(4), p. 04014055.
- Hendrickson, B. C. et al. (1987a). Hierarchical rule-based activity duration estimation. 113(2), pp. 288-301.
- Hendrickson, C., Zozaya-Gorostiza, C., et al. (1987b). Expert System for Construction Planning. *Journal of Computing in Civil Engineering*, 1(4), pp. 253-269.
- Hinze, J. (2004). *Construction planning and scheduling* (Vol. 228, p. 229). Upper Saddle River, NJ: Pearson/Prentice Hall.
- Hoffman, G. J., Thal Jr, A. E., Webb, T. S., & Weir, J. D. (2007). Estimating performance time for construction projects. *Journal of Management in Engineering*, 23(4), 193-199.
- Hossen, M. M., Kang, S., & Kim, J. (2015). Construction schedule delay risk assessment by using combined AHP-RII methodology for an international NPP project. *Nuclear engineering and technology*, 47(3), 362-379.
- Ibrahim, C.K.I.C., Costello, S. B., and Wilkinson, S. (2015). Development of an assessment tool for team integration in alliance projects. *International Journal of Managing Projects in Business*.
- International Organization for Standardization Technical Committee. (2018). *Risk Management-Guidelines* (Standard No. ISO 31000: 2018). Washington, DC: International Organization for Standardization.
- Jongo, J.S. Tesha, D.N.G.A.K., Kassonga, R., Teyanga, J.J., and Lyimo, K.S., (2019). Mitigation Measures in Dealing with Delays and Cost Overrun in Public Building Projects in Dar-Es-Salaam, Tanzania. *International Journal of Construction Engineering and Management*, 08(03), Pg. 81-96

- Kagermann, H., Wahlster, W., & Helbig, J. (2013). Securing the future of German manufacturing industry: Recommendations for implementing the strategic initiative INDUSTRIE 4.0. Final report of the Industrie, 4(0).
- Kandil, S., and Skaik, S. (2020). Mitigating delays in high-rise building projects: the case of Dubai.
- Kaplan, A. and Haenlein, M. (2019). Siri, Siri, in my hand: Who's the fairest in the land? On the interpretations, illustrations, and implications of artificial intelligence. *Business Horizons*. Elsevier, 62(1), pp. 15–25.
- Khair, K., Mohamed, Z., Mohammad, R., Farouk, H., & Ahmed, M. E. (2018). A management framework to reduce delays in road construction projects in Sudan. *Arabian journal for science and engineering*, 43(4), 1925-1940.
- Khoshnevis, B. (2004). Automated construction by contour crafting—related robotics and information technologies. *Automation in Construction*. Elsevier, 13(1), pp. 5–19.
- Khoshnevis, B., Hwang, D., Yao, K. T., & Yeh, Z. (2006). Mega-scale fabrication by contour crafting. *International Journal of Industrial and Systems Engineering*, 1(3), 301-320.
- Kikwasi, G. (2012). Causes and effects of delays and disruptions in construction projects in Tanzania. In *Australasian Journal of Construction Economics and Building-Conference Series* (Vol. 1, No. 2, pp. 52-59).
- Kim, G.H., An, S.H. and Kang, K.I. (2004). Comparison of construction cost estimating models based on regression analysis, neural networks, and case-based reasoning. *Building and Environment*. Pergamon, 39(10), pp. 1235–1242.
- Kim, S. Y., Van Tuan, N., & Ogunlana, S. O. (2009). Quantifying schedule risk in construction projects using Bayesian belief networks. *International Journal of Project Management*, 27(1), 39-50.
- Koch, J. E., Gransberg, D. D., & Molenaar, K. R. (2010, August). Project administration for Design-Build contracts: A primer for owners, engineers, and contractors. American Society of Civil Engineers.
- Kog, Y. C. (2017). Project management and delay factors of public housing construction. *Practice Periodical on Structural Design and Construction*, 23(1), 04017028.
- Kolyshkina, I., & Simoff, S. (2021). Interpretability of Machine Learning Solutions in Public Healthcare: The CRISP-ML Approach. *Frontiers in big Data*, 4, 18.
- Koo, C., Hong, T., Hyun, C. and Koo, K., (2010). A CBR-based hybrid model

- for predicting a construction duration and cost based on project characteristics in multi-family housing projects. *Canadian Journal of Civil Engineering*, 37(5), pp.739-752.
- Kraiem, Z. M. and Diekmann, J. E. (1987) 'Concurrent Delays in Construction Projects', *Journal of Construction Engineering and Management*, 113(4), pp. 591–602.
- Kuncheva, L. I. (2014). *Combining pattern classifiers: methods and algorithms*. John Wiley & Sons.
- Larrañaga, P., Atienza, D., Diaz-Rozo, J., Ogbechie, A., Puerto-Santana, C. E., & Bielza, C. (2018). *Industrial Applications of Machine Learning*. CRC Press.
- Larsen, J. K., Shen, G. Q., Lindhard, S. M., & Brunoe, T. D. (2016). Factors affecting schedule delay, cost overrun, and quality level in public construction projects. *Journal of management in engineering*, 32(1), 04015032.
- Latham, S. M. (1994). *Constructing the team*.
- Le, T. T., Austin, S. A., Lim, S., Buswell, R. A., Gibb, A. G., & Thorpe, T. (2012). Mix design and fresh properties for high-performance printing concrete. *Materials and structures*, 45(8), 1221-1232.
- Lee, H.-S., Lee, J.-Y. and Lee, J.-S. (1999). Nonshored Formwork System for Top-Down Construction. *Journal of Construction Engineering and Management*, 125(6), pp. 392–399.
- Lessing, B., Thurnell, D. and Durdyev, S. (2017). Main Factors Causing Delays in Large Construction Projects: Evidence from New Zealand.
- Li, Y., Lu, K., & Lu, Y. (2017). Project schedule forecasting for skyscrapers. *Journal of Management in Engineering*, 33(3), 05016023.
- Lloret, E., Shahab, A. R., Linus, M., Flatt, R. J., Gramazio, F., Kohler, M., & Langenberg, S. (2015). Complex concrete structures: Merging existing casting techniques with digital fabrication. *Computer-Aided Design*, 60, 40-49.
- Love, P.E.D., Li, H. Irani, Z., Treloar, G.J. and Faniran, O.O. (2000). MiDiCON: A model for mitigating delays in construction. Paper presented at the 1st International Conference on Systems Thinking in Management, ICSTM2000. Geelong, Australia, 8–10 November.
- Lowe, D. J., Emsley, M. W., & Harding, A. (2006). Predicting construction cost using multiple regression techniques. *Journal of construction engineering and management*, 132(7), 750-758.
- Mackova, D., Kozlovska, M., Baskova, R., Spisakova, M., & Krajnikova, K. (2017).

- Construction-duration prediction model for residential buildings in Slovak Republic based on computer simulation. *International Journal of Applied Engineering Research*, 12(13), 3590-3599.
- McCulloch, W. S., & Pitts, W. (1943). A logical calculus of the ideas immanent in nervous activity. *The bulletin of mathematical biophysics*, 5(4), 115-133.
- Meyer, W. G. (2015). Quantifying risk: measuring the invisible. Paper presented at PMI® Global Congress 2015— EMEA, London, England. Newtown Square, PA: Project Management Institute.
- Motaleb, O. H. (2014). Development of a risk response model to handle delays of construction projects in the United Arab Emirates (Doctoral dissertation).
- Nagata, M. (2018). Concurrent Delay Intro.: What Does a Concurrent Delay Argument Look Like and Why Is It Made? Available at: <https://www.linkedin.com/pulse/concurrent-delay-intro-what-does-argument-look-like-why-mark-nagata/>. Accessed: 16/11/2021
- Newman, P. (2001). Sustainability and Cities: The Role of Tall Buildings in this New Global Agenda. *Tall Buildings and Urban Habitat*, (903), 75.
- Ng, L.F. (2007). Determinant factors of implementing build then sell in Malaysia: Housing developers' point of view. MSc diss. Universiti Sains Malaysia, Pulau Pinang, Malaysia.
- Ng, S. T., Deng, M. Z., Lam, K. C., and Skitmore, M. (2000). A conceptual case-based decision model for mitigating construction delays. *International Journal of Construction Information Technology*, 8(2), 1-20.
- Ogunlana, S. O., Promkuntong, K., & Jearkjirm, V. (1996). Construction delays in a fast-growing economy: comparing Thailand with other economies. *International journal of project Management*, 14(1), 37-45.
- Oyegoke, A. S., & Al Kiyumi, N. (2017). The causes, impacts and mitigations of delay in megaprojects in the Sultanate of Oman. *Journal of Financial Management of Property and Construction*.
- Peško, I., Mučenski, V., Šešlija, M., Radović, N., Vujkov, A., Bibić, D., & Krklješ, M. (2017). Estimation of costs and durations of construction of urban roads using ANN and SVM. *Complexity*, 2017.
- Paintsquare (2021). Developer Sued for Delayed Boston High-Rise. Available at: <https://www.paintsquare.com/news/?fuseaction=view&id=24360>. Accessed 30 January 2022.
- Pourroostam, T., & Ismail, A. (2012). Causes and effects of delay in Iranian

- construction projects. *International Journal of Engineering and Technology*, 4(5), 598.
- PricewaterhouseCoopers (2017). *Innovation for the earth*. Technical Report 161222-113251-LA-OS, World Economic Forum, Davos.
- Pultar, M. (1990). Progress-Based Construction Scheduling. *Journal of Construction Engineering and Management*, 116(4), pp. 670–688.
- Ren, Z., Atout, M. and Jones, J. (2008). Root causes of construction project delays in Dubai. in 24th Annual ARCOM Conference, 1-3 September 2008, Cardiff, UK, Association of Researchers in Construction Management, pp. 749–757.
- Saeed, S. A. A. (2009). *Delay to Projects-cause, effect and measures to reduce/eliminate delay by mitigation/acceleration* (Doctoral dissertation, British University in Dubai).
- Sakamoto, S., & Mitsuoka, H. (1994). Totally mechanized construction system for high-rise buildings (T-UP system). *Automation and Robotics in Construction* Xi, 465-72.
- Sambasivan, M. and Soon, Y. W. (2007). Causes and effects of delays in Malaysian construction industry. *International Journal of Project Management*. Pergamon, 25(5), pp. 517–526.
- Sanni-Anibire, M. O., Mohamad Zin, R., & Olatunji, S. O. (2020). Causes of delay in the global construction industry: a meta analytical review. *International Journal of Construction Management*, 1-13.
- Santoso, D. S. and Soeng, S. (2016). Analyzing Delays of Road Construction Projects in Cambodia: Causes and Effects. *Journal of Management in Engineering*, 32(6), p. 05016020.
- Sarkisian, M. (2016). *Designing tall buildings: Structure as architecture*. Routledge.
- Sawhney, A., Riley, M., and Irizarry, J. (2020). *Construction 4.0: An Innovation Platform for the Built Environment*.
- Schäfer, F., Zeiselmaier, C., Becker, J., & Otten, H. (2018). Synthesizing CRISP-DM and quality management: a data mining approach for production processes. In 2018 IEEE International Conference on Technology Management, Operations and Decisions (ICTMOD) (pp. 190-195). IEEE.
- Schelling, X., & Robertson, S. (2020). A development framework for decision support systems in high-performance sport. *International Journal of Computer Science in Sport*, 19(1), 1-23.
- Skitmore, R. M., & Ng, S. T. (2003). *Forecast models for actual construction*

- time and cost. *Building and environment*, 38(8), 1075-1083.
- Suksai, S., Mounгноi, W., Charoenpornpattana, S., & Homthong, S. (2015). Delay Factors between Main Contractors and Nominated Subcontractors in High Rise Buildings in Thailand. *GSTF Journal of Engineering Technology*, 3(3).
- Tafazzoli M. & Shrestha P.P., (2017) ' Investigating Causes of Delay in U.S. Construction Projects', 53rd ASC Annual International Conference Proceedings by the Associated Schools of Construction, Seattle, Washington.
- Tharwat, A. (2018). Classification assessment methods. *Applied Computing and Informatics*.
- Toor, S.-U.-R. and Ogunlana, S. (2008). Problems causing delays in major construction projects in Thailand. *Construction Management and Economics*, 26(4), pp. 395–408.
- Trauner, T. (2009) *Construction Delays: Understanding Them Clearly, Analyzing Them Correctly*.
- Tumi, S.A. H., Omran, A., & Pakir, A. H. K. (2009). Causes of delay in construction industry in Libya. In *The International Conference on Economics and Administration* (pp. 265-272).
- Ullah, K., Khan, M. S., Lakhia, M. T., Vighio, A. A., & Sohu, S. (2018). Ranking of effects of construction delay: evidence from Malaysian building projects. *Journal of Applied Engineering Sciences*, 8(1), 79-84.
- United Nations, UN (2015). *World Urbanization Prospects: The 2015 Revision-Highlights*. United Nations, New York.
- Vacanas, Y., and Danezis, C. (2021). Determination of Effective Delay-Avoidance Practices in Construction Projects. *Journal of Legal Affairs and Dispute Resolution in Engineering and Construction*, 13(1), 04520039.
- Vidhate, N. B. and Patil, D. U. (2015). To Study and Analyze Different Causes of Delay in Construction Projects: A Review. *International Journal of Global Technology Initiatives*, 4(1), pp. A30–A35.
- Wauters, M. and Vanhoucke, M. (2017). A Nearest Neighbour extension to project duration forecasting with Artificial Intelligence. *European Journal of Operational Research*. North-Holland, 259(3), pp. 1097–1111.
- Witten, I. H. (2011). *Data Mining Practical Machine Learning Tool and Techniques*.
- Woodley, C. (2019). Will digitalisation end construction disputes?

Construction Research and Innovation, 10(1), 15-17.

- Wu, X., Kumar, V., Quinlan, J.R., Ghosh, J., Yang, Q., Motoda, H., McLachlan, G.J., Ng, A., Liu, B., Yu, P.S. and Zhou, Z.H., (2007). Top 10 algorithms in data mining Knowledge and Information Systems, vol. 14, no. 1.
- Xia, R., Zong, C., & Li, S. (2011). Ensemble of feature sets and classification algorithms for sentiment classification. Information Sciences, 181(6), 1138-1152.
- Xu, Z., Zayed, T., & Niu, Y. (2020). Comparative analysis of modular construction practices in mainland China, Hong Kong and Singapore. Journal of Cleaner Production, 245, 118861.
- Yang, J.B., Yang, C.C. and Kao, C.K. (2010). Evaluating schedule delay causes for private participating public construction works under the Build-Operate-Transfer model. International Journal of Project Management. Pergamon, 28(6), pp. 569-579.
- Yaseen, Z. M., Ali, Z. H., Salih, S. Q., & Al-Ansari, N. (2020). Prediction of risk delay in construction projects using a hybrid artificial intelligence model. Sustainability, 12(4), 1514.
- Yuen, B. (2012). Singapore: planning for more with less. In Planning Asian Cities (pp. 213-231). Routledge.

Web references

- <https://web.archive.org/web/20091126203038/http://www.arabianbusiness.com/547358-kingdom-holding-says-tower-not-on-hold>
- <https://www.arabianbusiness.com/construction/389437-jeddah-tower-going-ahead-after-saudi-corruption-purge>
- <https://www.theurbandevloper.com/articles/jeddah-tower-progress-update-worlds-tallest-tower>
- <https://www.dezeen.com/2018/03/12/worlds-tallest-skyscraper-jeddah-tower-adrian-smith-gordon-gill/>
- <https://www.constructionweekonline.com/projects-tenders/article-44380-saudis-jeddah-tower-faces-further-delays>
- <https://asce-ncs.org/index.php/19-section-meetings/prior-years/19-2014-11-design-and-top-down-construction-at-marriott-marquis-hotel>
- <https://www1.bca.gov.sg/buildsg/productivity/design-for-manufacturing-and-assembly-dfma/prefabricated-prefinished-volumetric-construction-ppvc/prefabricated-prefinished-volumetric->

construction-case-study-the-clement-canopy

https://www.kone-major-projects.com/Images/brochure-kone-jumplift_tcm118-25933.pdf

<https://www.archdaily.com/591331/chinese-company-creates-the-world-s-tallest-3d-printed-building>

<https://www.theconstructionindex.co.uk/news/view/japanese-robots-to-work-on-high-rise-buildings>

http://www.spillboom.20m.com/contact_1.html

<https://www.traunerconsulting.com/concurrent-delay-intro-what-does-a-concurrent-delay-argument-look-like-and-why-is-it-made/>

<https://en.wikipedia.org/wiki/Construction>

<https://www.mathworks.com/discovery/machine-learning.html#:~:text=Machine%20learning%20uses%20two%20types,intrinsic%20structures%20in%20input%20data.>

http://www.mpcsc.org/case_topic.htm?id=1888

DELAY MITIGATION IN TALL BUILDING PROJECTS

The rise of tall buildings in urban centres across the globe has been attributed to the need to create more urban space for an imminent population explosion and urbanization crisis. Despite the potential of this building typology as a sustainable alternative to urban design, it has become notorious for being delayed, and sometimes abandoned. The research domain is saturated with numerous studies on the causes of construction delays, however inadequate effort has been channelled towards the development of prescriptive tools with the potential to mitigate construction delay. The desired solution is one that would employ innovative methods to arrive at problem solving strategies for the ultimate purpose of delay mitigation. Today, the fourth industrial revolution (IR 4.0) offers the construction industry a unique opportunity to solve its many woes, such as delays, through leveraging the capabilities of digital technologies such as artificial intelligence and machine learning. Thus, it is the purpose of this book to describe a delay mitigation framework proposed for tall building projects based on the application of machine learning. The application of machine learning is considered in three major areas of project delay risk mitigation including "reliable cost estimates", "reliable duration estimates", and "delay risk assessment". Interestingly, the concept of the delay mitigation framework can be extended to other project types, besides tall building projects.

THE AUTHORS



Dr. Mulazz Oladapo Sanni-Anibire is a Lecturer in Damman Community College, King Fahd University of Petroleum and Minerals, Kingdom of Saudi Arabia. He obtained his PhD in Civil Engineering from the Universiti Teknologi Malaysia in 2021. His research interests include digital construction management structural design of tall buildings, safety, risk and reliability assessment of civil engineering facilities. He is a member of the Nigerian Society of Engineers.



Dr. Rosli Mohamad Zin is a Professor in the Department of Structure and Materials, School of Civil Engineering, Universiti Teknologi Malaysia. He has more than 25 years of teaching experience both at the undergraduate and postgraduate levels. His research interests include construction management, sustainable construction practice and constructability.



Dr. Sunday Olusanya Olatunji (Aadam) is an Associate Professor in the Department of Computer Engineering, College of Computer Science and Information Technology, Imam Abdulrahman bin Faisal University, Damman, Kingdom of Saudi Arabia. He has more than 20 years of teaching and research experience both at the undergraduate and postgraduate levels. His research interests include Artificial Intelligence/Computational Intelligence, data science and Machine Learning and their real-life applications in different fields.



ISBN 978-967-0061-10-8



For more information,
please scan the code

